



THE ANSWER TO IDEAL LIVING

# PRODUCT INSTALLATION MANUAL

WHEN IT COMES TO HOME, THIS IS THE BEST ANSWER.

# FRAMED LED MIRROR

With Front and Backlit



# User Manual

## **Before Installation**

**Thank you so much for choosing our mirrors, in order to facilitate the use of our products, please read this instruction carefully before installation.**

### **Please Notice:**

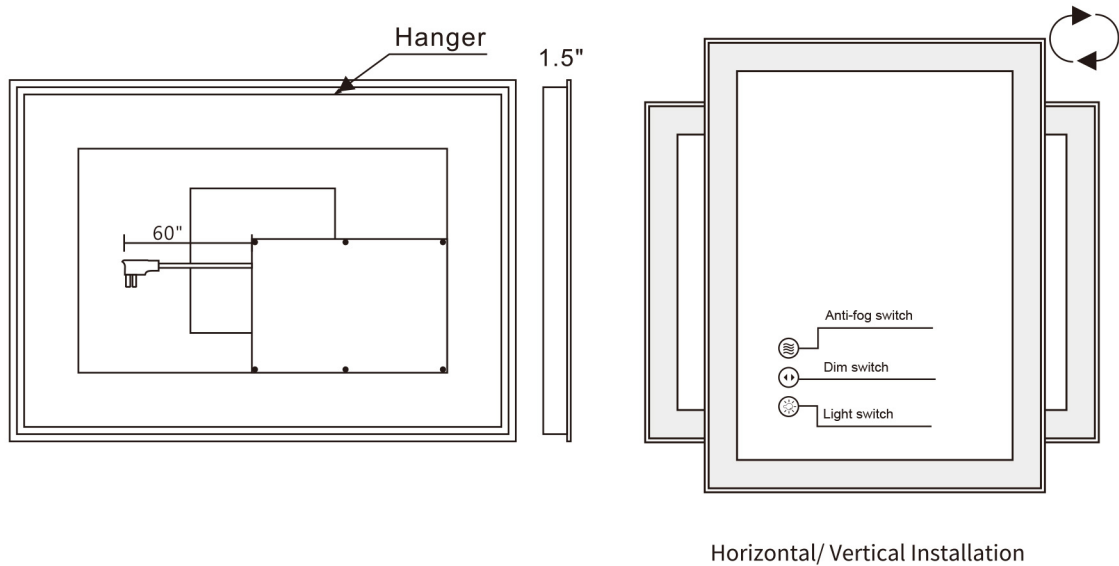
1. Please read all instructions carefully before assembling the item.
2. After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.
3. Please power the mirror with plug to test all its functions before installing on the wall.
4. Assembly by two or more adults is highly recommended.
5. Disconnect power before installing, adding or changing any components.
6. Ensure that the fixing location is able to take the weight of the complete fitting.
7. Keep the voltages 120V. If the voltage exceeds 120V, please use transformer.
8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.

### **DANGER - To reduce the risk of electric shock:**

1. Always disconnect this furnishing from supply main before cleaning or servicing

**For any problems, please feel free to contact us:**

## Product Description



### Before installation, please check to make sure these functions work properly:



**Anti-fog switch:** After connecting the power, the anti-fog function is already turn on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after it's turned on and close in 1 hour, so you can turn it on 10 minutes before taking a bath.



**Dim switch:** The led light supports 10% to 100% brightness adjustment, just long press the button. This button has memory function, the next time you open the mirror it will be in the same brightness it was in before it was last closed, which means that you don't have to touch the buttons each time.



**Color temperature switch:** The front and back lights all have three color temperatures that can be switch(3000K/4000K/6000K), just need to short press this button. And this button has a memory function as well.


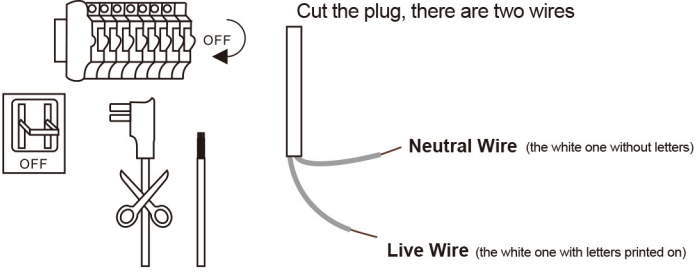
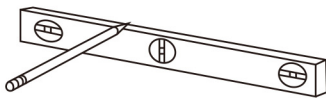
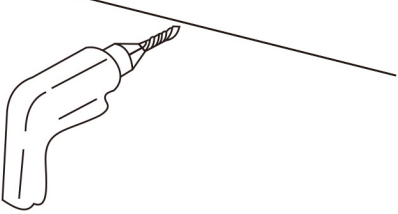
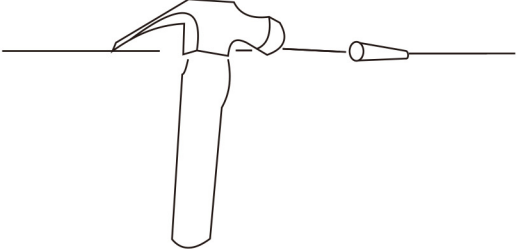
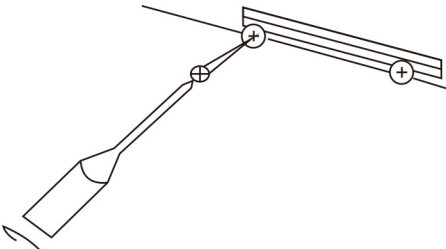
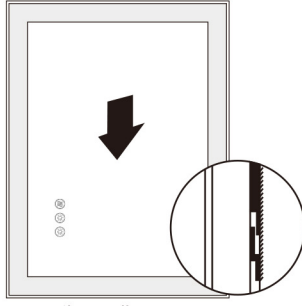
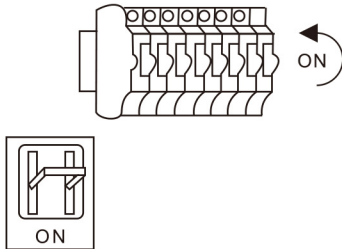
## Product Information

Anti-fog	Yes
Memory	Yes
Certificate	ETL
Light Source	LED
Cable Length	1.5M
Material	Tempered Glass
Input Voltage	120V~; 50/60Hz
Warranty	3-year manufacturer


# Specifications and Parameters

Model	Size	Thickness	Touch Button	LED Stripe Model	Color Temperature	Lumen	CRI	Power(W)	Input Voltage (V)	Weight (kg)
L001B5070	20" X 28"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	4372	90	48	120V~, 50/60Hz	6.9
L001B6080	24" X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	5252	90	60	120V~, 50/60Hz	8.8
L001B6090	24" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	5692	90	60	120V~, 50/60Hz	9.68
L001B7090	28" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6132	90	80	120V~, 50/60Hz	11
L001B15070	28" X 60"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8772	90	100	120V~, 50/60Hz	16.8
L001B10080	32" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7012	90	80	120V~, 50/60Hz	15.48
L001B12080	32" X 48"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7892	90	100	120V~, 50/60Hz	15.4
L001B18181	32" X 72"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	10651	90	150	120V~, 50/60Hz	22.5
L001B9080	36" X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6572	90	80	120V~, 50/60Hz	12.09
L001B9090	36" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7012	90	80	120V~, 50/60Hz	15.48
L001B12191	36" X 48"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8460	90	100	120V~, 50/60Hz	17.2
L001B9696	38" X 38"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7452	90	80	120V~, 50/60Hz	14.88
L001B10075	40" X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	6836	90	80	120V~, 50/60Hz	12.63
L001B10090	40" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7452	90	100	120V~, 50/60Hz	14.55
L001B12075	48" X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	7716	90	100	120V~, 50/60Hz	16.84
L001B120100	48" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8772	90	100	120V~, 50/60Hz	21.24
L001B13975	55" X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	8508	90	100	120V~, 50/60Hz	19
L001B13990	55" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	9168	90	150	120V~, 50/60Hz	22.74
L001B15075	60" X 30"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	9124	90	150	120V~, 50/60Hz	19.84
L001B15090	60" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	9652	90	150	120V~, 50/60Hz	26.55
L001B150100	60" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	10092	90	150	120V~, 50/60Hz	28.97
L001B18191	72" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	11110	90	150	120V~, 50/60Hz	31.32
L001B181100	72" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	11487	90	150	120V~, 50/60Hz	34.32
L001B21080	84" X 32"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	11984	90	150	120V~, 50/60Hz	32.9
L001B213100	84" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	12864	90	150	120V~, 50/60Hz	41.13
L001B24091	96" X 36"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	13665	90	150	120V~, 50/60Hz	43
L001B280100	110" X 40"	1.5"	3	2835 3 colors 192LED	3000/4000/6000	15604	90	150	120V~, 50/60Hz	55.12


# Installation Instruction

Method 1: Plug in	Method 2: Hardwire
 <p>Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.</p>	 <p>Cut the plug, there are two wires</p> <p><b>Neutral Wire</b> (the white one without letters)</p> <p><b>Live Wire</b> (the white one with letters printed on)</p> <p>Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).</p>
<p><b>Step 1</b></p>	<p><b>Step 2</b></p>
 <p>Draw a straight line with a ruler to keep the mirror horizontal</p>	 <p>Use a electric drill to punch four holes at the marked spots.</p>
<p><b>Step 3</b></p>	<p><b>Step 4</b></p>
 <p>Apply wall anchors with hammer.</p>	 <p>Use a screwdriver to screw the screws into the wall anchors.</p>
<p><b>Step 5</b></p>	<p><b>Step 6</b></p>
 <p>Hang the mirror on the wall</p>	 <p>Turn on the power.</p>


## Package contents

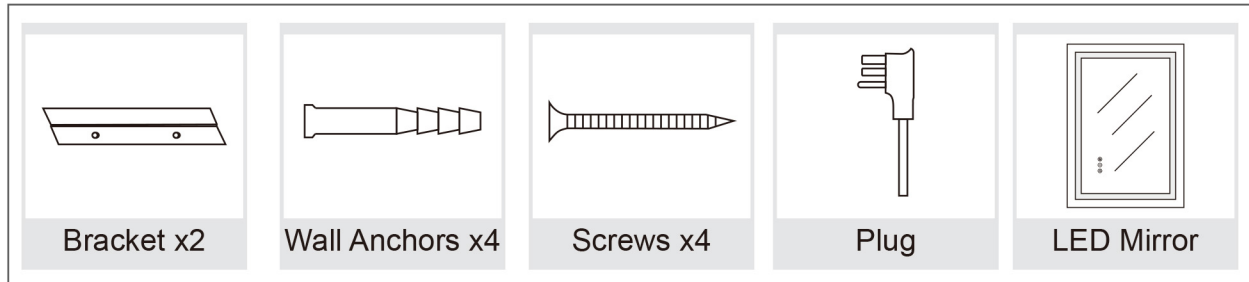


## You may need these tools

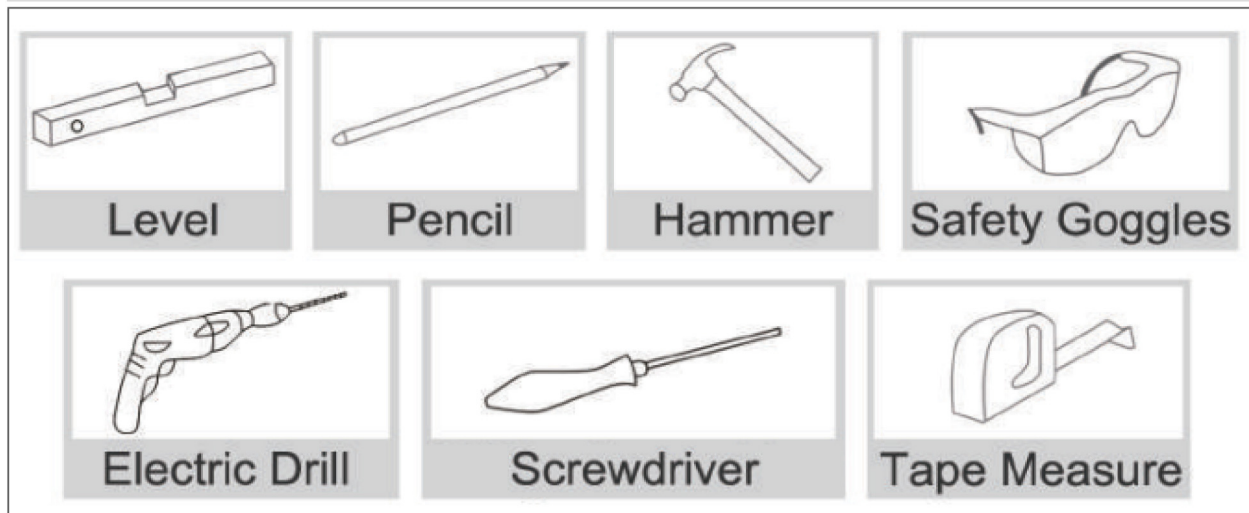

### SIZE 1

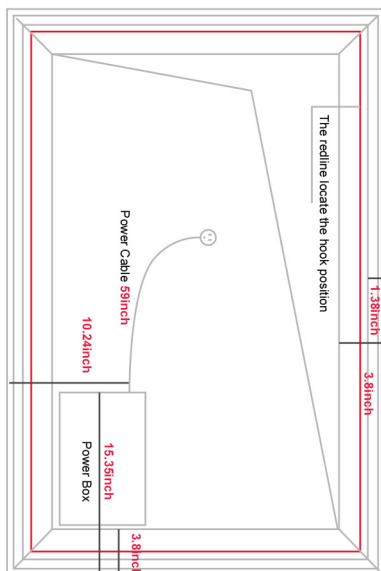

### SIZE 2

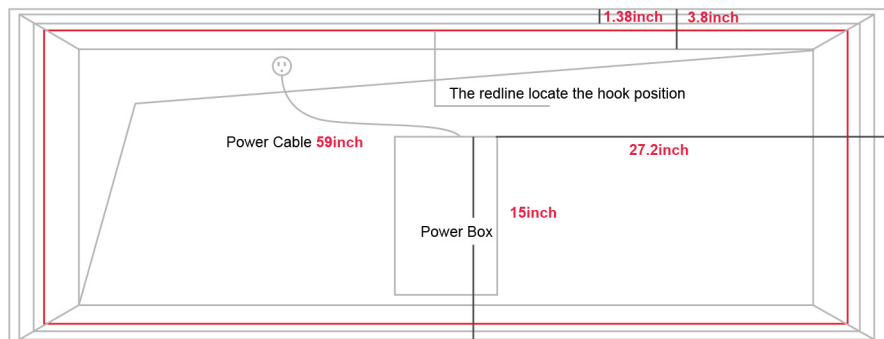

PS: The location of the button is located the power box.

## Meaning of LED Lights

State of LED Light	Meaning
White Light ON	Function is Working
Blue Light ON	Function Standby
Light OFF	Power OFF

## Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the power box on the back of the mirror and test the power cables, tighten the cables if they are loose. ( Please cut off the power firstly before testing the power supply and cables).
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.



THE ANSWER TO IDEAL LIVING



**Call us (9-8 EST): +1 888-257-3857**

**Email us (24/5) : [service@casainc.com](mailto:service@casainc.com)**

**Message us : +1 562-551-8092**

**For sales : [dtc@casainc.com](mailto:dtc@casainc.com)**