


Installation Manual

Two function thermostatic shower set

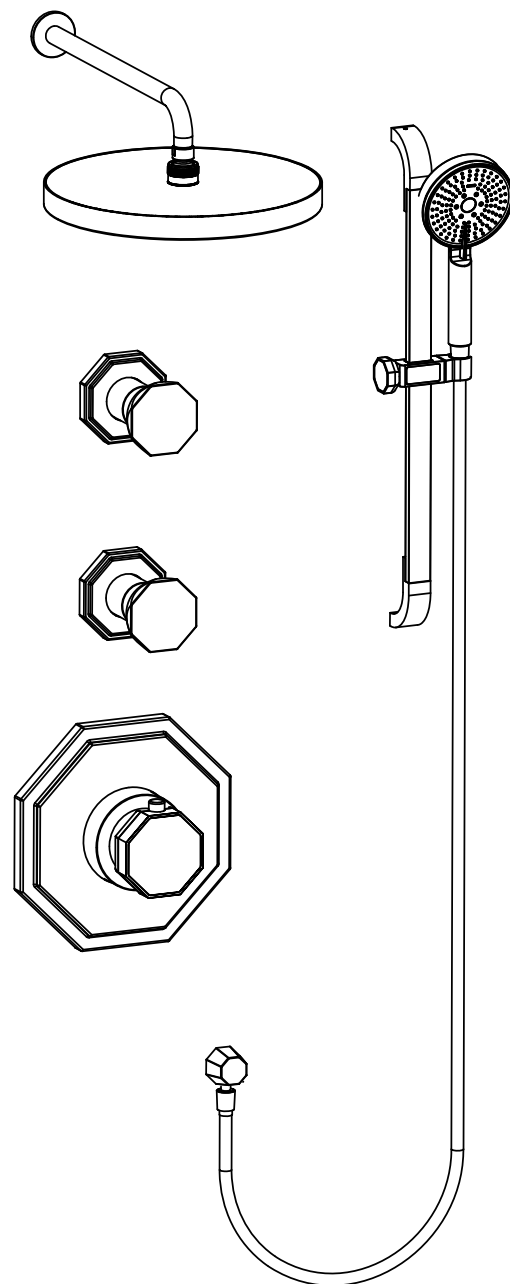

Thank you for purchasing this product. All products are carefully engineered, and factory tested to provide long trouble-free use under normal conditions. This product is easy to install using basic tools and our easy to follow illustrated instructions.

1 Pre-installation Check

Technical Specifications

Operating Pressure

Min: 50Kpa/0.5 bar

Max: 750Kpa/7.5 bar

Recommended: 150kpa/1.5bar-500kpa/5bar

Operating Temperature:

Hot: 70°C

Cold: 5°C

Inlet Connections: G1/2

2 Notes for installation

1) Please do not connect hot and cold water supply lines in reverse. This could result in hot water flowing from cold line and cause scalding.


2) The feed-water temperature of water shall not exceed 85°C. Exceeding 85° may cause scalding, the service life of faucets might be shortened, or the faucet might be damaged.

3) The valve must be installed on the deck that is strong and thick enough.


4) After installation, please make sure the faucet is securely mounted.

⚠ Warning: Read all the instructions completely before proceeding. We recommend calling a professional if you are uncertain about installing this product.

3 Close the water valve and cut the water source. Find the water valve. Normally it should be near the water meter.

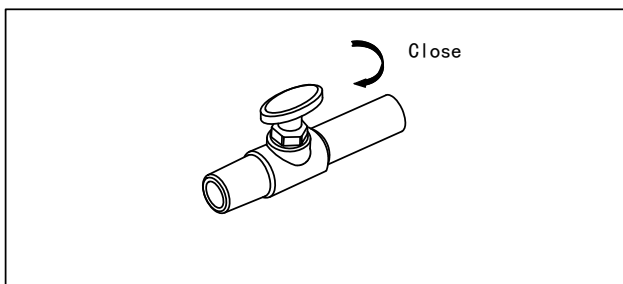


4 Tools

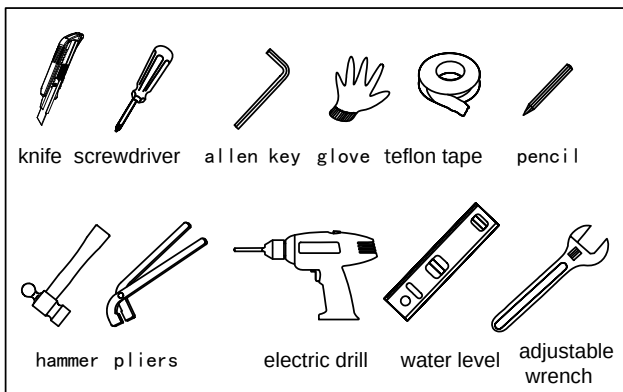


5 Installation

Build-in range

Build-in range
(Finish wall)
Min 70
Max 85

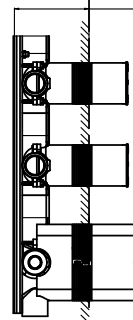


Size reference for reserved hole on the wall

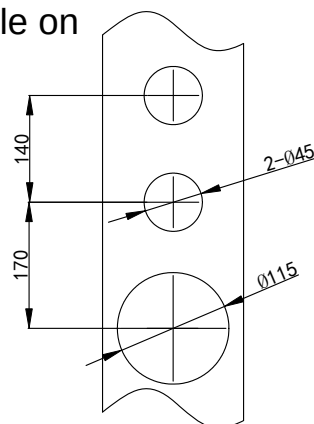


Concealed part size


Size for set

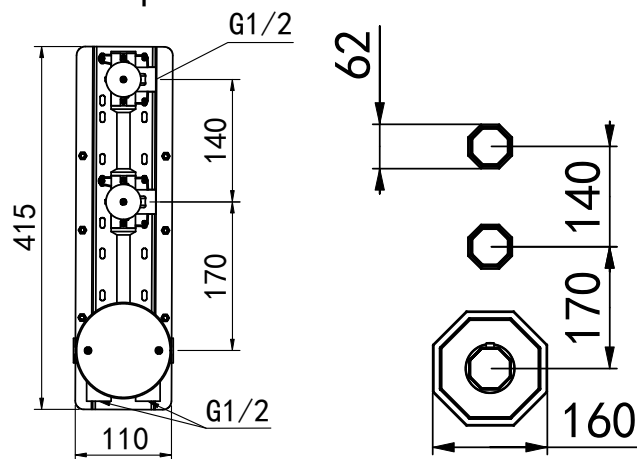


6 Piping

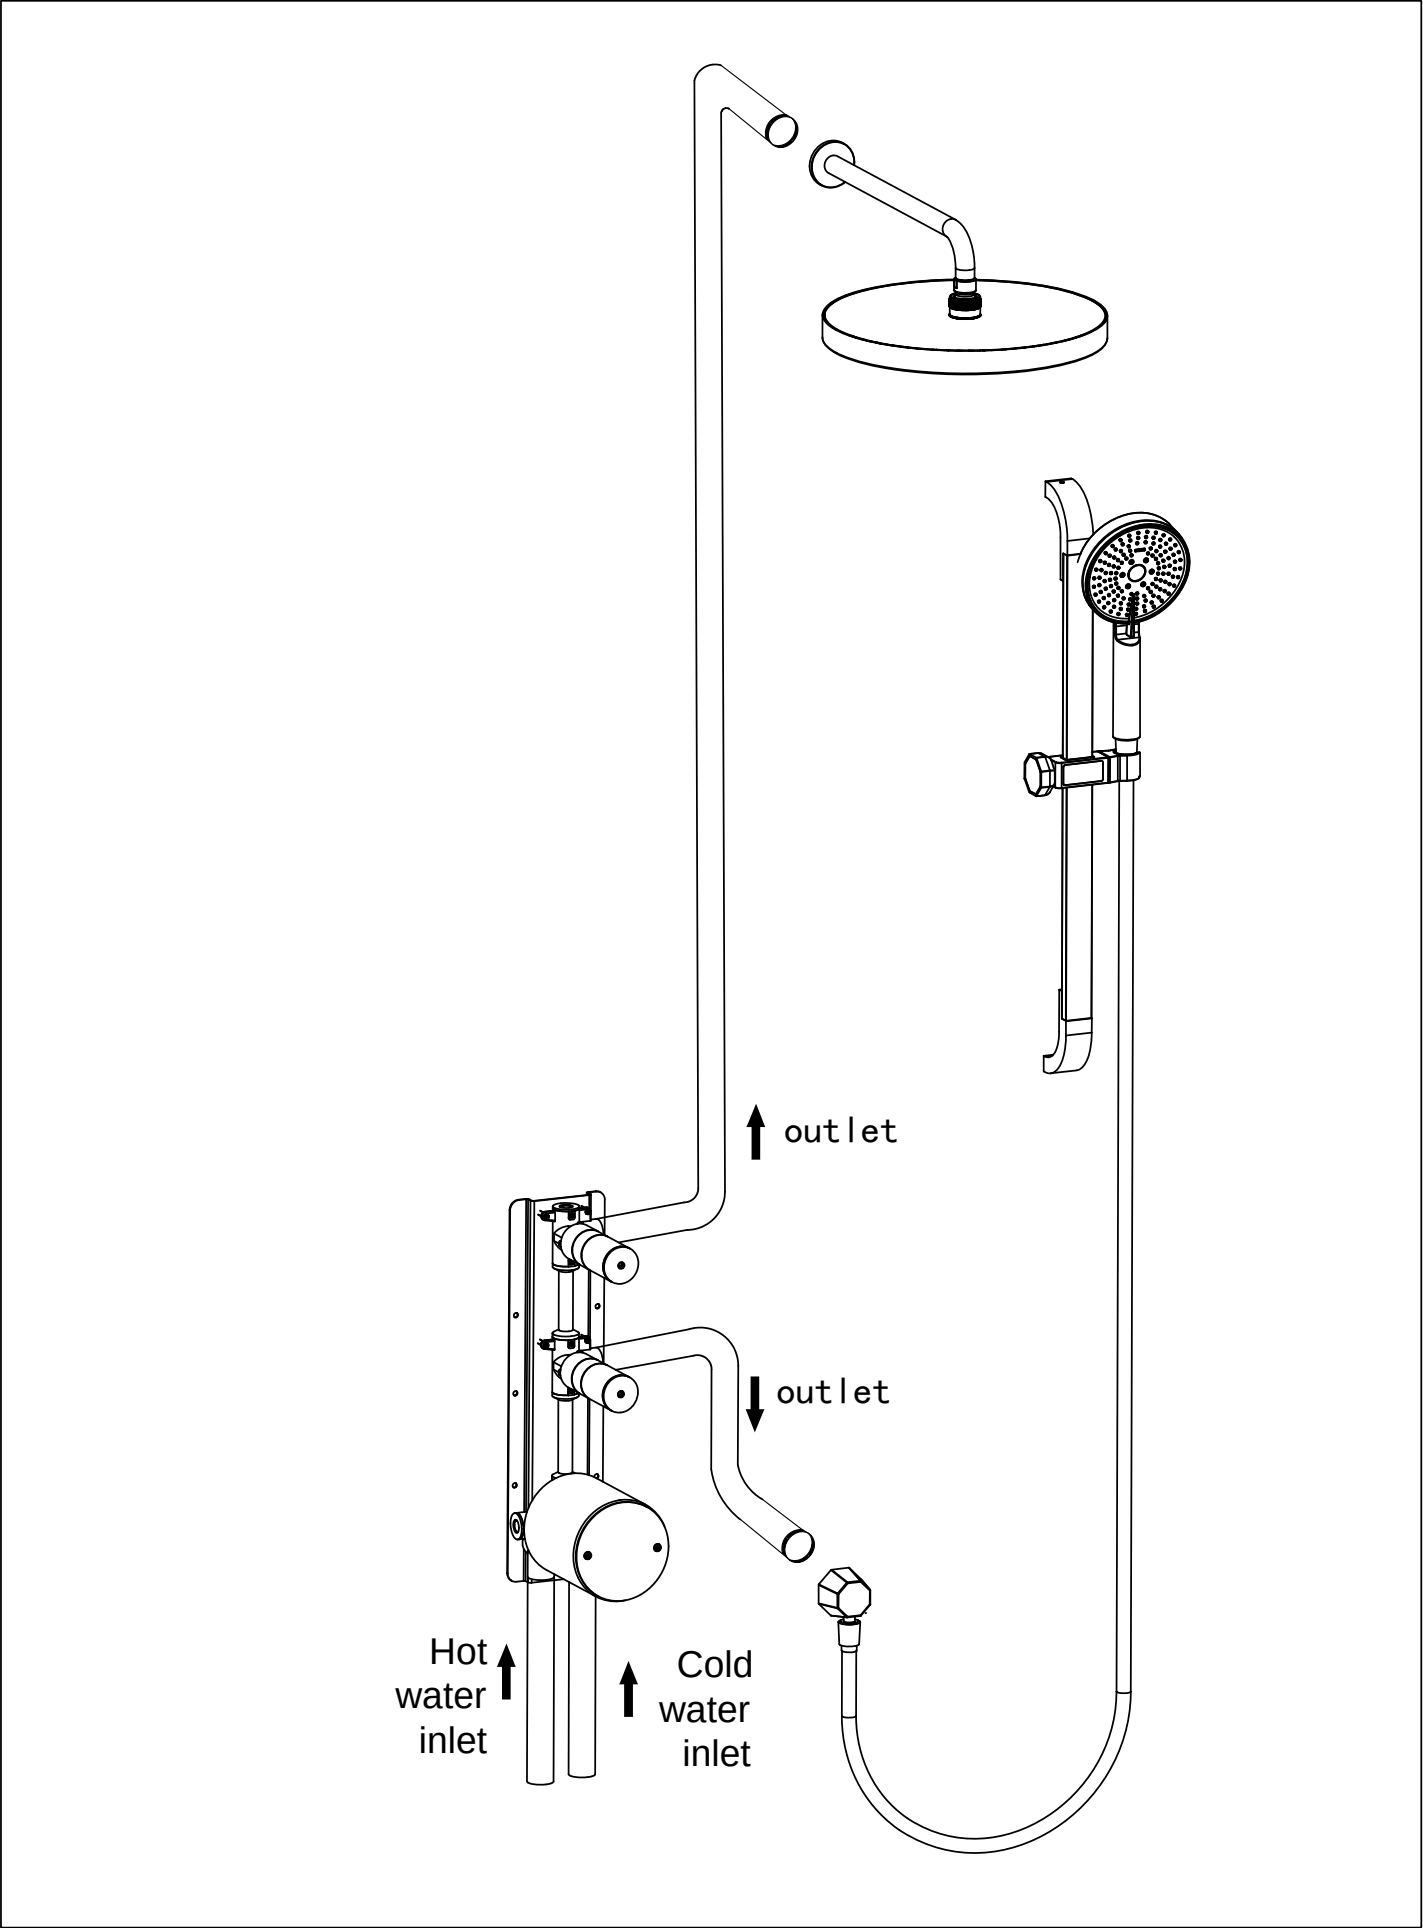


7 Installation for trim

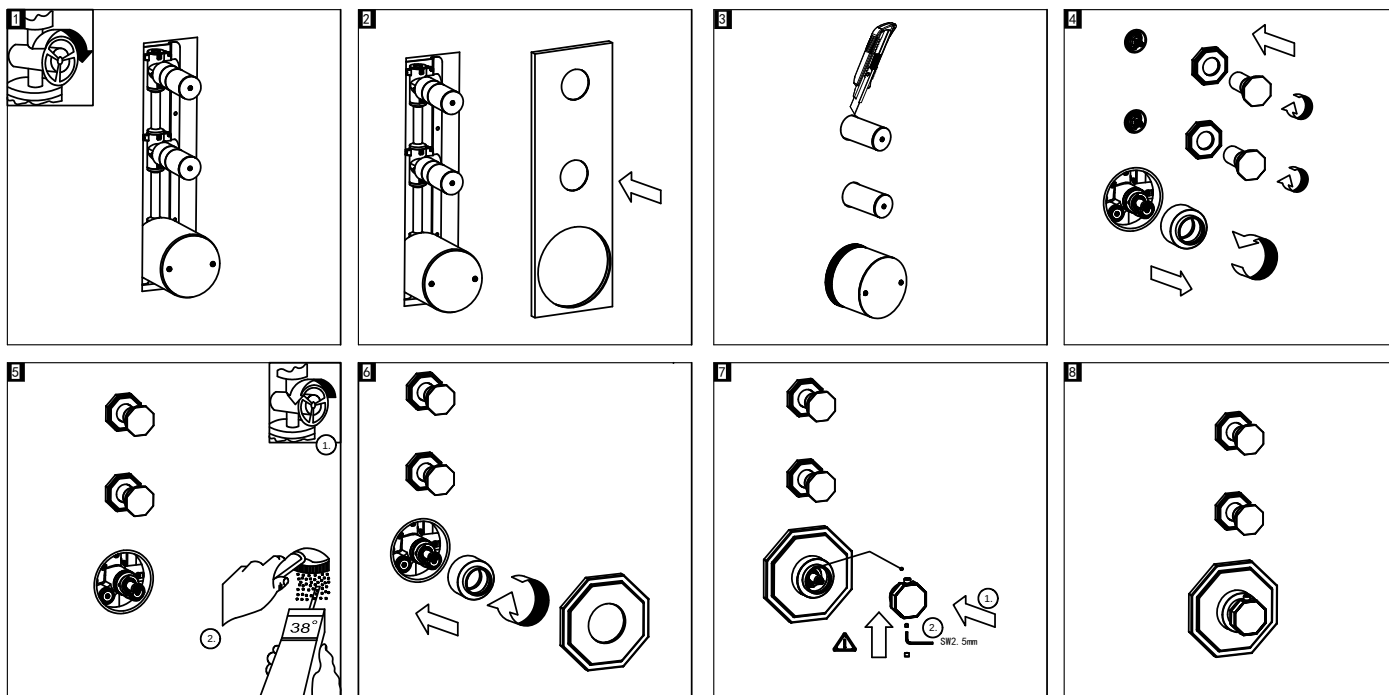


8 Function introduction

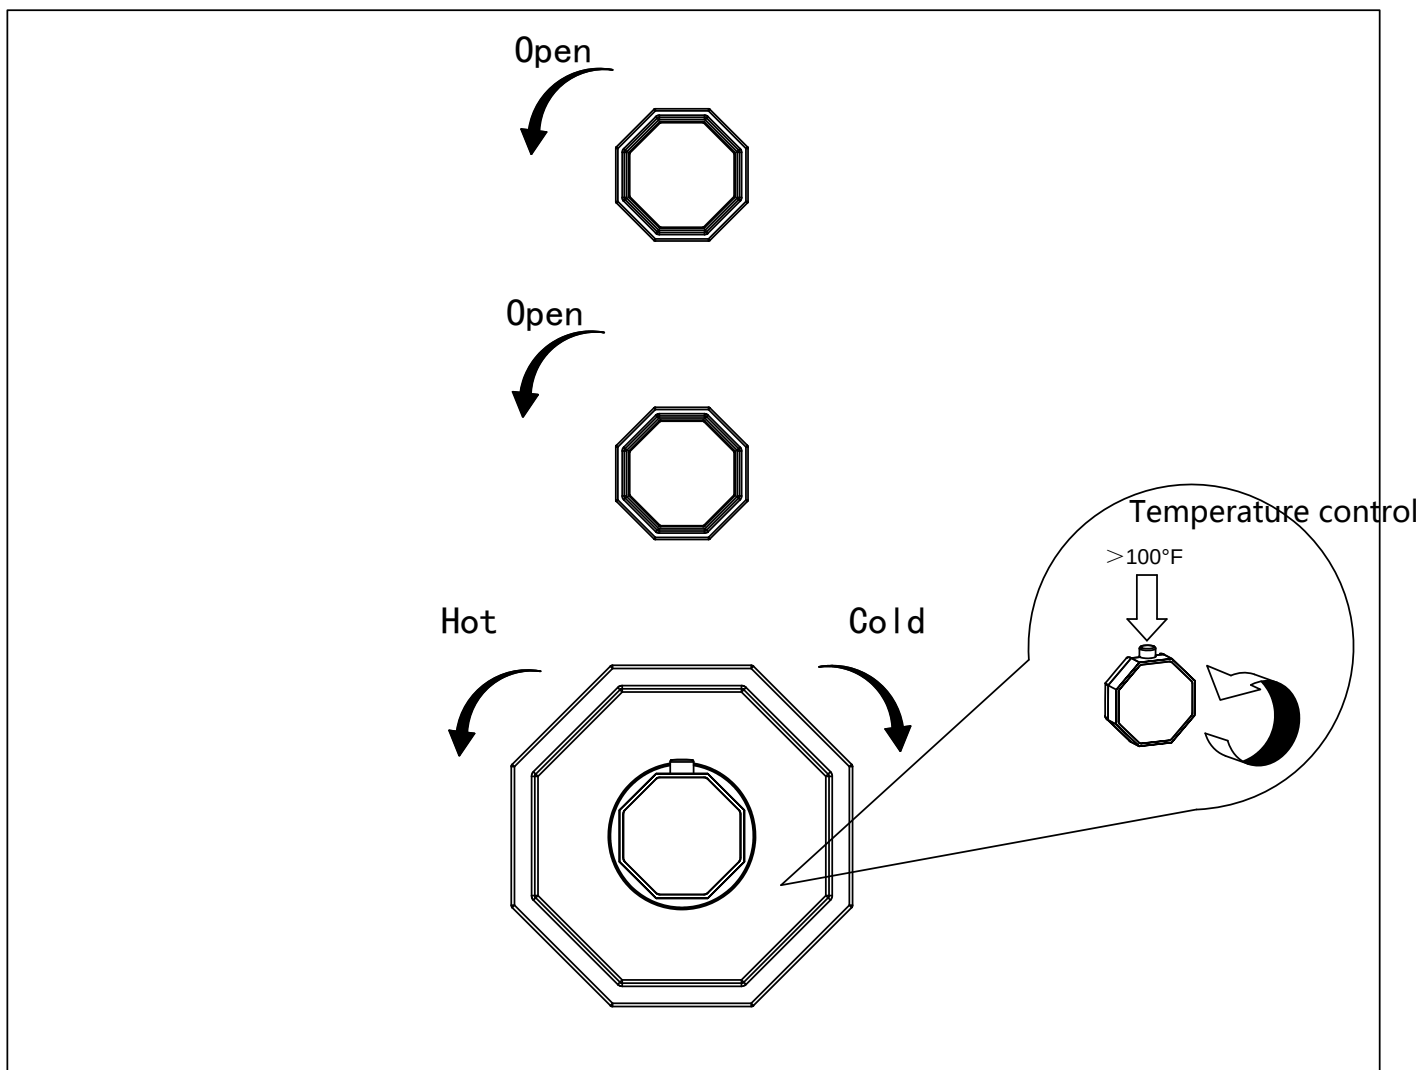

9 Size for set

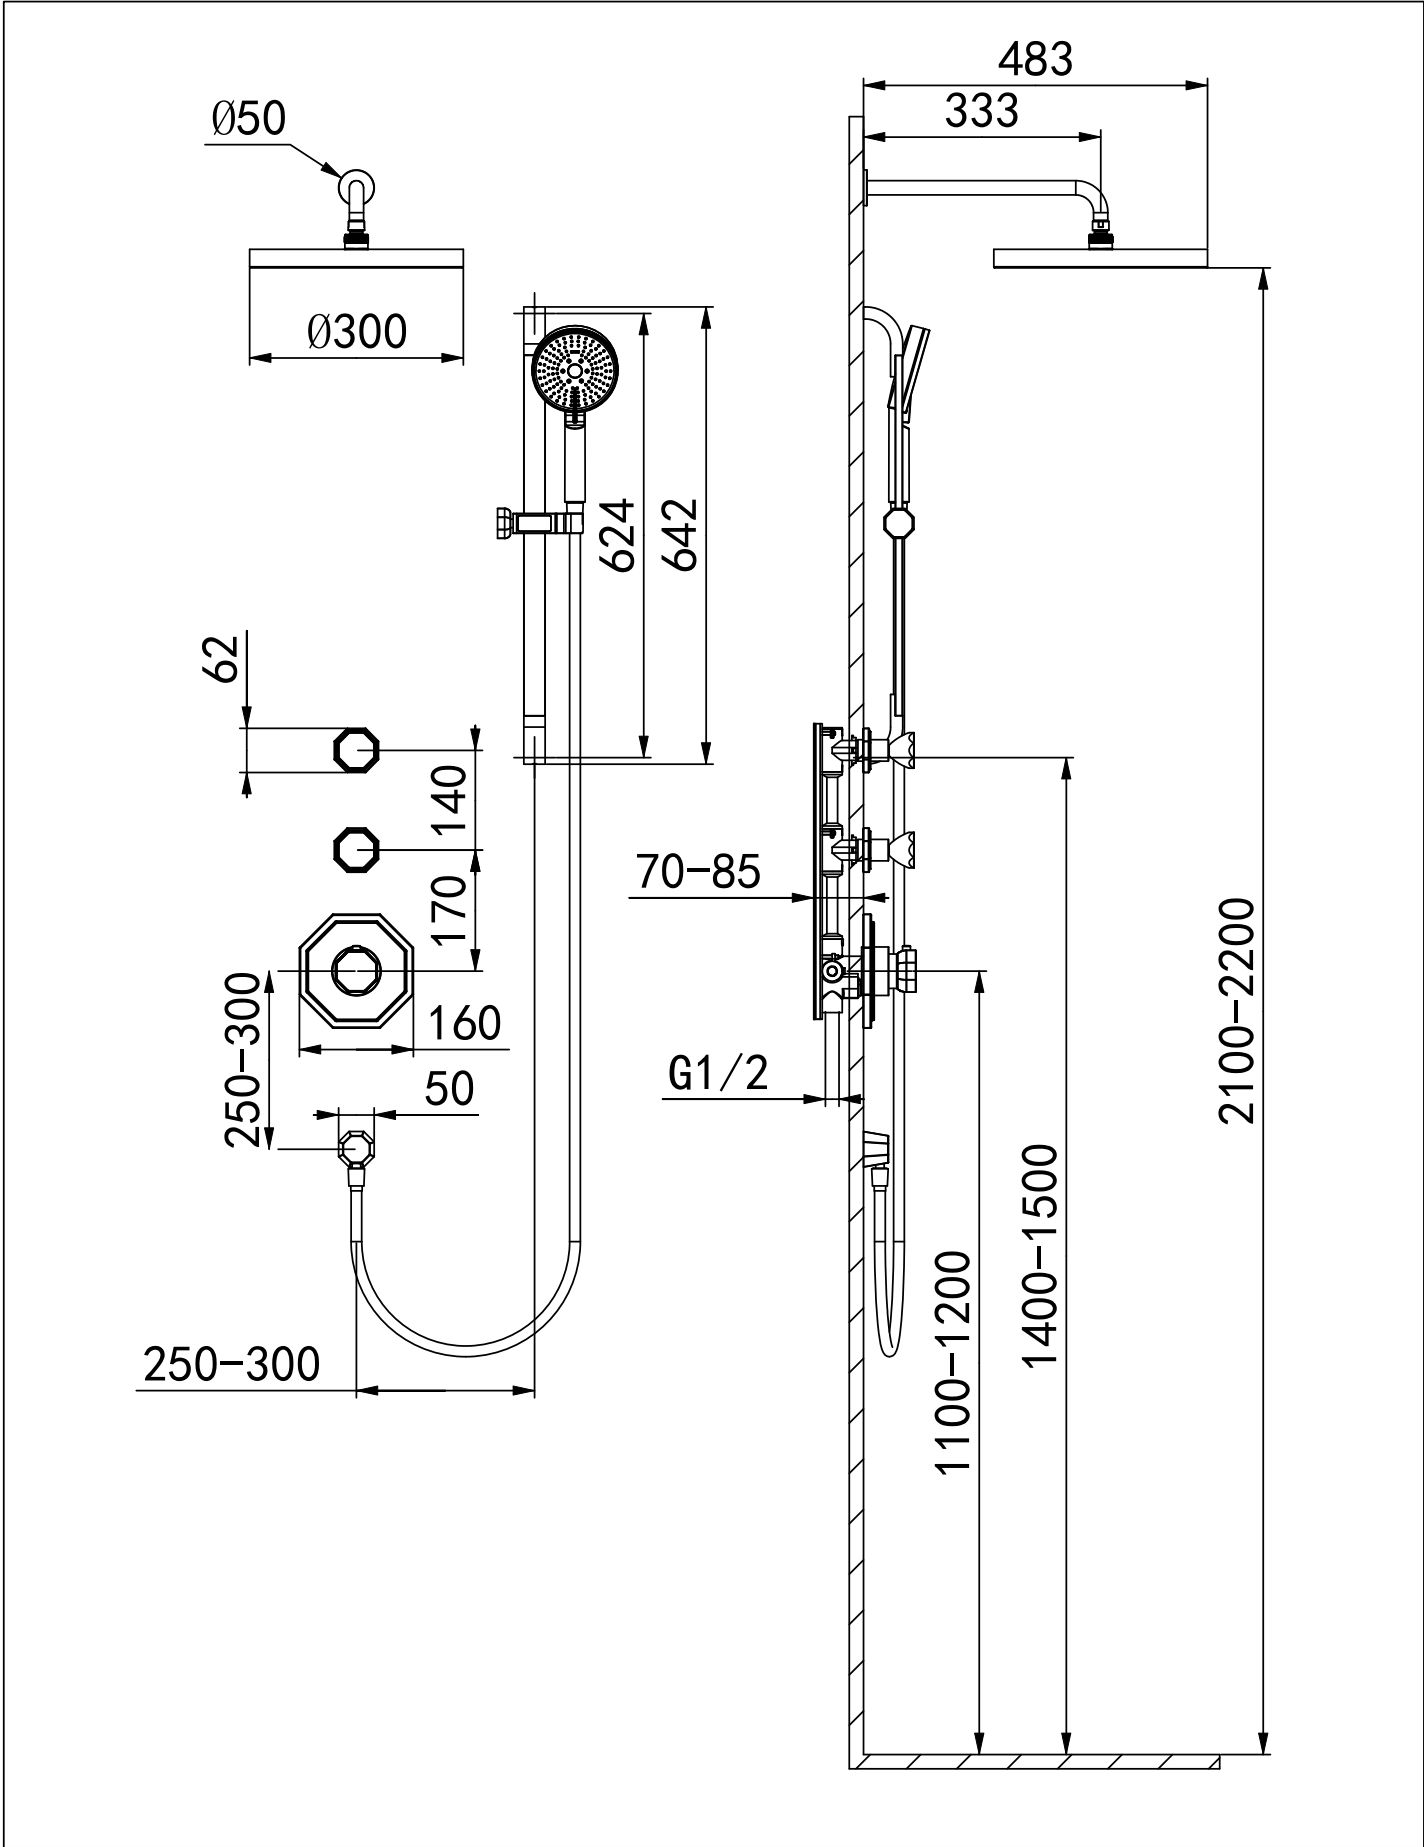

10 Cartridge, aerator clean and maintenance

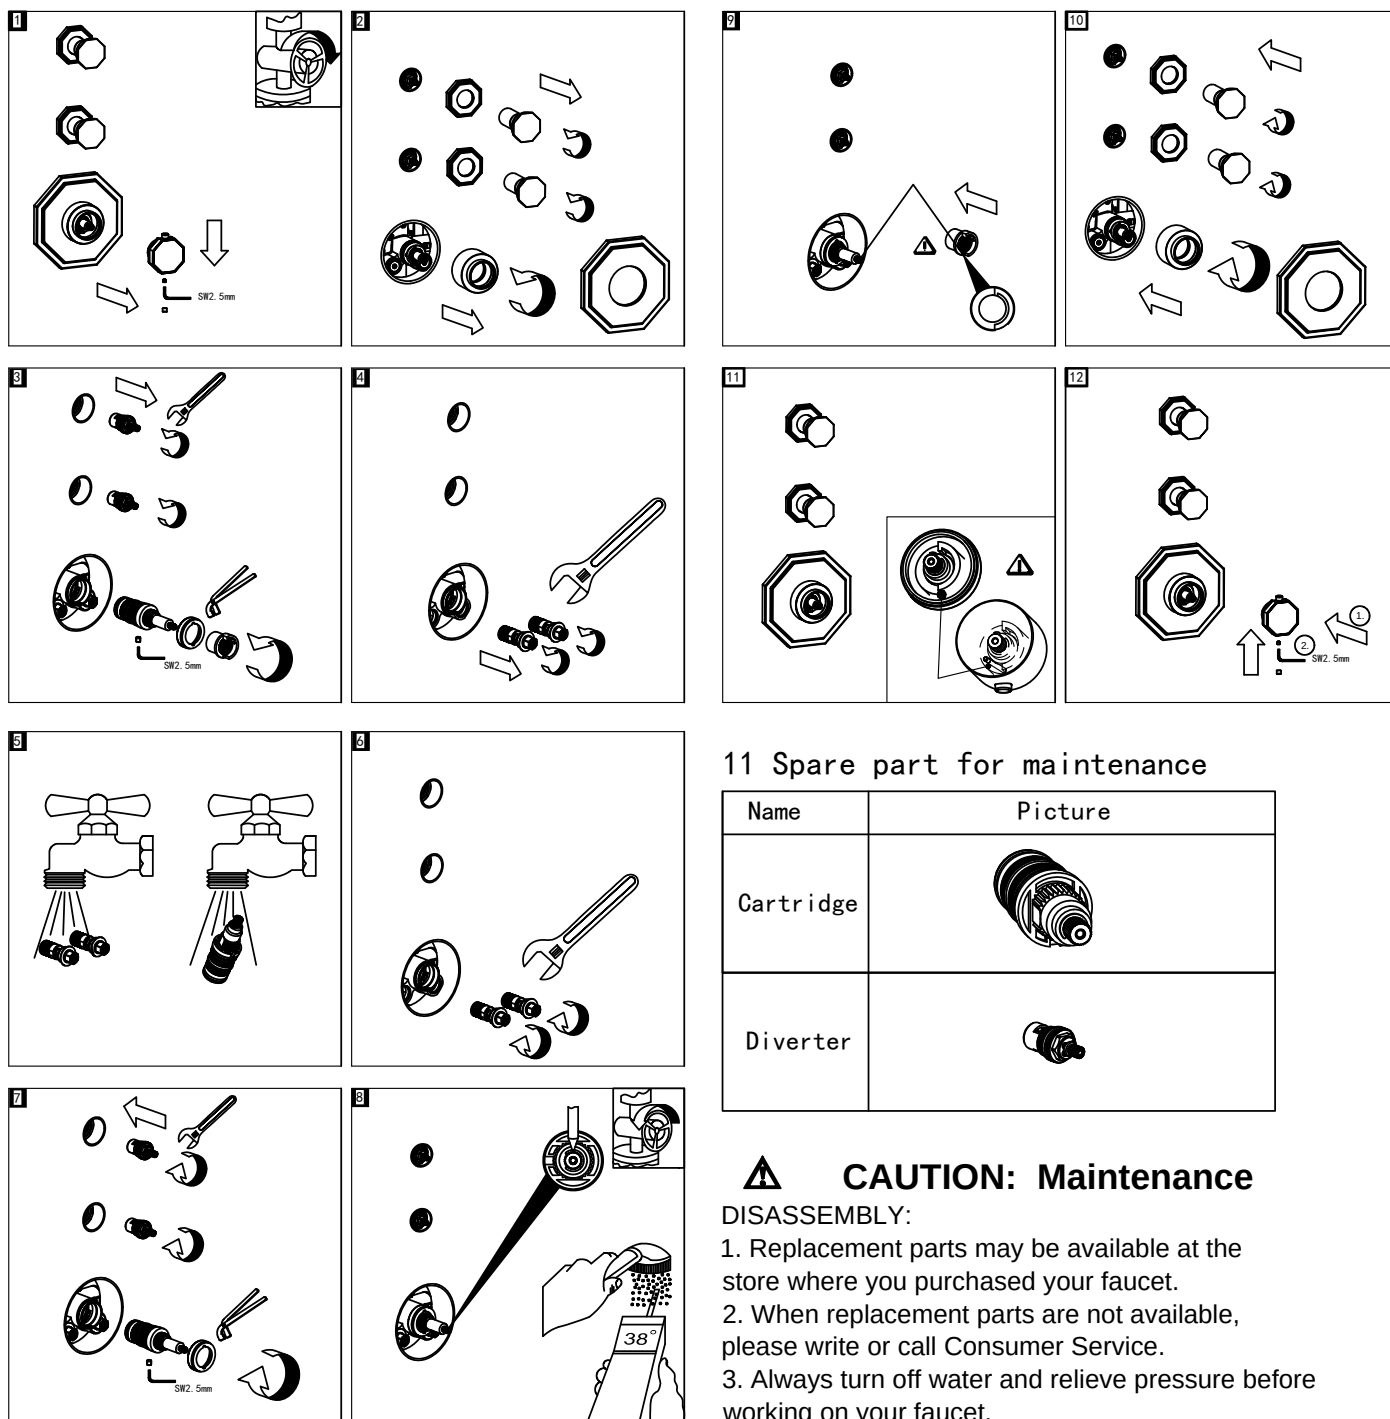

11 Spare part for maintenance

Name	Picture
Cartridge	
Diverter	

⚠ CAUTION: Maintenance

DISASSEMBLY:

1. Replacement parts may be available at the store where you purchased your faucet.
2. When replacement parts are not available, please write or call Consumer Service.
3. Always turn off water and relieve pressure before working on your faucet.

⚠ NOTE: Cleaning Instructions:

For all decorative finishes, use only a soft damp cloth to clean and shine. Use of polish, detergents, abrasive cleaners, organic solvents or acid may cause damage. Use of other than a soft damp cloth will nullify our warranty.