



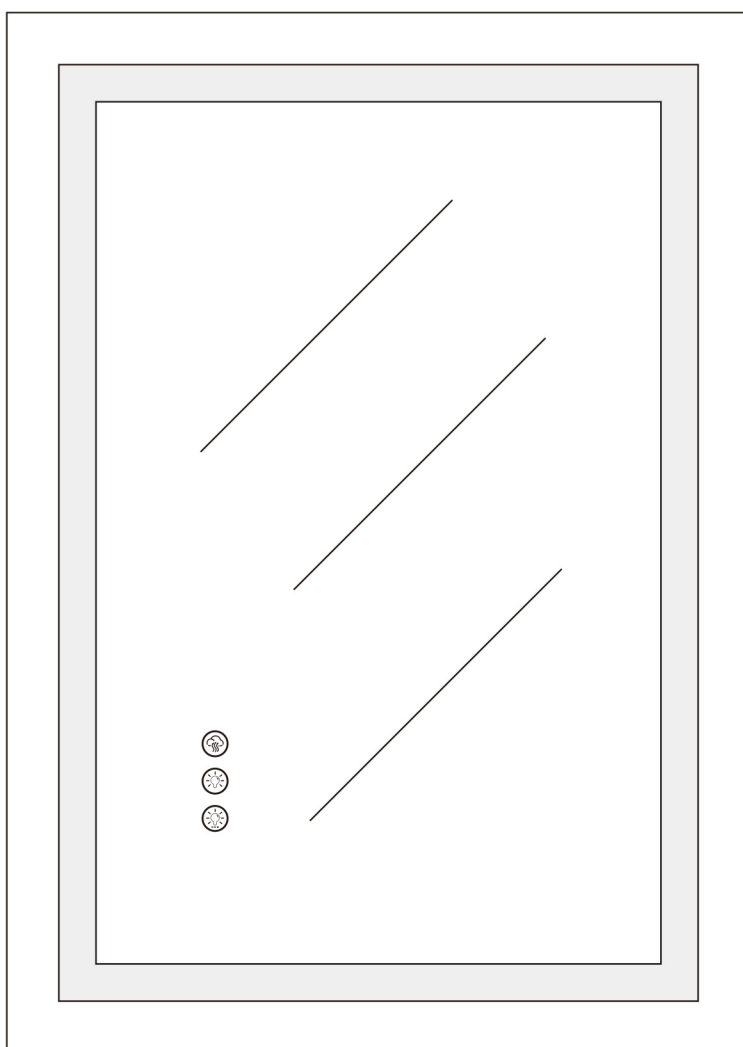
THE ANSWER TO IDEAL LIVING

PRODUCT INSTALLATION MANUAL

WHEN IT COMES TO HOME, THIS IS THE BEST ANSWER.

RGB LED MIRROR

With Front and RGB Backlit



User Manual

Before Installation

Thank you so much for choosing our mirrors, in order to facilitate the use of our products, please read this instruction carefully before you begin installation.

Please Notice:

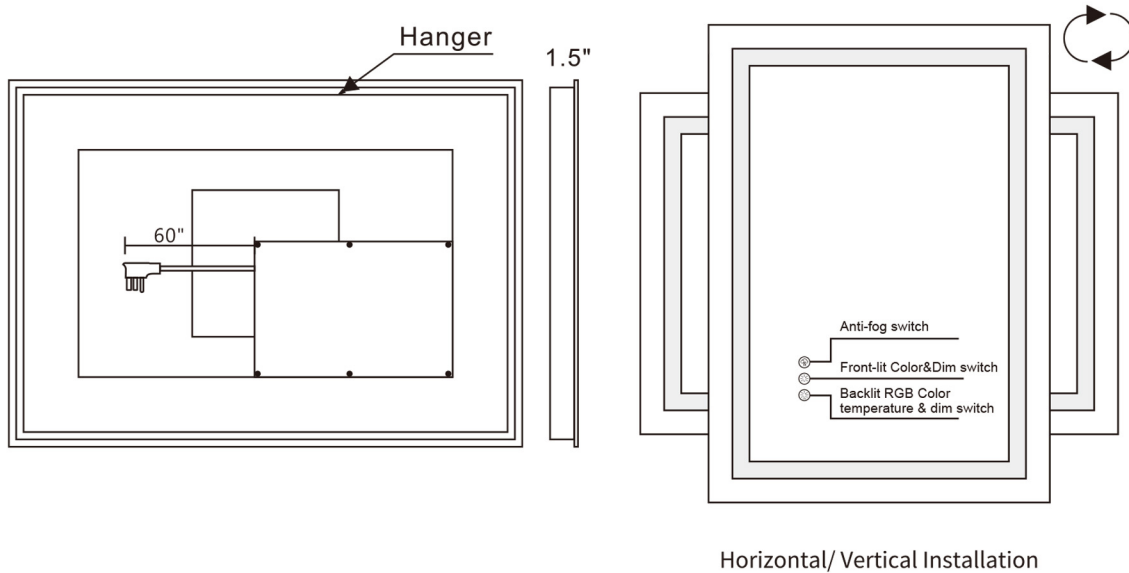
1. Please read all instructions carefully before assembling the item.
2. After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.
3. Please power the mirror with plug to test the all of functions of the mirror before wall mount.
4. Assembly by two or more adults is highly recommended.
5. Disconnect power before installing, adding or changing any components.
6. Ensure that the fixing location is able to take the weight of the complete fitting.
7. Keep the voltages 110V. If the voltage exceeds 110V, please use transformer.
8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.

DANGER - To reduce the risk of electric shock:

1. Always disconnect this furnishing from supply main before cleaning or servicing

For any problems, please feel free to contact us:

Product Description



Before installation, please check to make sure these functions work properly:



Anti-fog switch: After connecting the power, the anti-fog function is already turn on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after it's turned on and close in 1 hour, so you can turn it on 10 minutes before taking a bath.



Front-lit color & dim switch: front-lit color & dim switch has three color temperatures options. Short press this button to change the color temperature among cold light, white light, warm light and turn on/off the light. Long press this button to adjust the brightness of the light. Dimmable range 20%-100%.



Backlit RGB Color temperature & dim switch: The RGB Backlit have 8 Model RGB color temperatures that can be switch(Cold light, White light, Warm light, Colorful, Pink, Red, Green, Blue). Short press this button to change the color among colorful, cold light, white light, warm light, pink, red, green, blue. Long press this button to adjust the brigtness of the light.









Product Information

Anti-fog	Yes
Memory	Yes
Light Source	LED
Cable Length	1.5M
Material	Tempered Glass
Input Voltage	120V~; 50/60Hz


Specifications and Parameters

Model	Size	Thickness	Touch Button	LED Stripe Model	Color Temperature	Lumen	CRI	Power(W)	Input Voltage (V)	Weight (kg)
L001AC7050RGB	20" X 28"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	6780	90	60	120V~, 50/60Hz	6.9
L001AC8060RGB	24" X 32"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	8220	90	80	120V~, 50/60Hz	8.8
L001AC9060RGB	24" X 36"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	8943	90	80	120V~, 50/60Hz	9.68
L001AC10060RGB	24" X 40"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	7687	90	80	120V~, 50/60Hz	10.5
L001AC9070RGB	28" X 36"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	9376	90	80	120V~, 50/60Hz	11
L001AC15070RGB	28" X 60"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	14250	90	150	120V~, 50/60Hz	16.8
L001AC10080RGB	32" X 40"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	12216	90	100	120V~, 50/60Hz	15.48
L001AC12080RGB	32" X 48"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	13611	90	150	120V~, 50/60Hz	15.4
L001AC18181RGB	32" X 72"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	12210	90	150	120V~, 50/60Hz	22.5
L001AC8090RGB	36" X 32"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	11304	90	100	120V~, 50/60Hz	12.09
L001AC9090RGB	36" X 36"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	12216	90	100	120V~, 50/60Hz	15.48
L001AC12191RGB	36" X 48"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	14490	90	150	120V~, 50/60Hz	17.2
L001AC9696RGB	38" X 38"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	13093	90	100	120V~, 50/60Hz	14.88
L001AC10075RGB	40" X 30"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	11771	90	100	120V~, 50/60Hz	12.63
L001AC10090RGB	40" X 36"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	12860	90	100	120V~, 50/60Hz	14.55
L001AC12075RGB	48" X 30"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	13326	90	150	120V~, 50/60Hz	16.84
L001AC120100RGB	48" X 40"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	15192	90	150	120V~, 50/60Hz	21.24
L001AC13975RGB	55" X 30"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	14250	90	150	120V~, 50/60Hz	19
L001AC13990RGB	55" X 36"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	15986	90	150	120V~, 50/60Hz	22.74
L001AC15090RGB	60" X 36"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	16250	90	150	120V~, 50/60Hz	26.55
L001AC150100RGB	60" X 40"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	17525	90	150	120V~, 50/60Hz	28.97
L001AC18191RGB	72" X 36"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	18000	90	150	120V~, 50/60Hz	31.32
L001AC181100RGB	72" X 40"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	19990	90	150	120V~, 50/60Hz	34.32
L001AC21380RGB	84" X 32"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	22380	90	150	120V~, 50/60Hz	32.9
L001AC213100RGB	84" X 40"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	22424	90	150	120V~, 50/60Hz	41.13
L001AC24091RGB	96" X 36"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	18620	90	150	120V~, 50/60Hz	43
L001AC280100RGB	110" X 40"	1.18"	3	RGB 3 colors 192LED	3000/4000/6000	27634	90	150	120V~, 50/60Hz	55.12

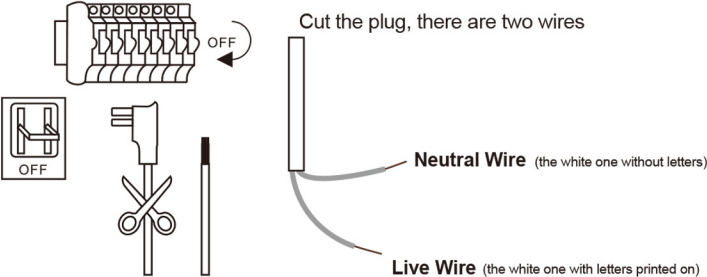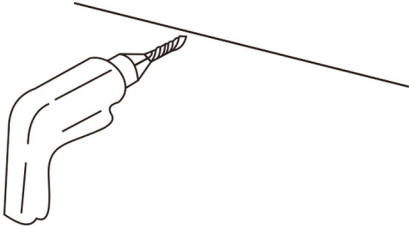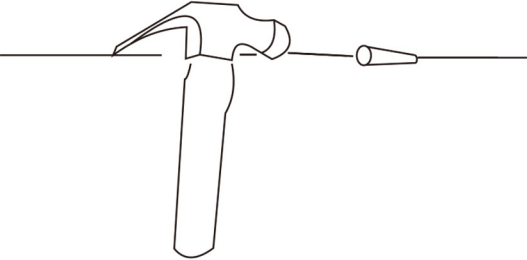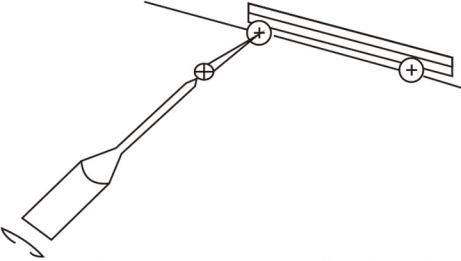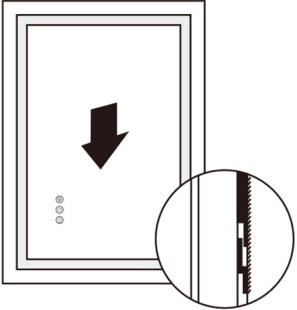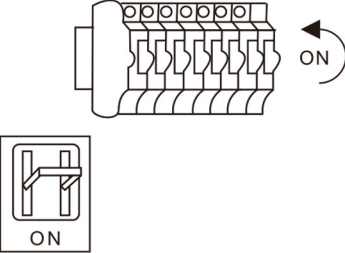
Installation Instruction

Method 1: Plug in	Method 2: Hardwire
 <p>Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.</p>	 <p>Cut the plug, there are two wires</p> <p>Neutral Wire (the white one without letters)</p> <p>Live Wire (the white one with letters printed on)</p> <p>Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).</p>
Step 1	Step 2
 <p>Draw a straight line with a ruler to keep the mirror horizontal</p>	 <p>Use a electric drill to punch four holes at the marked spots.</p>
Step 3	Step 4
 <p>Apply wall anchors with hammer.</p>	 <p>Use a screwdriver to screw the screws into the wall anchors.</p>
Step 5	Step 6
 <p>Hang the mirror on the wall</p>	 <p>Turn on the power.</p>

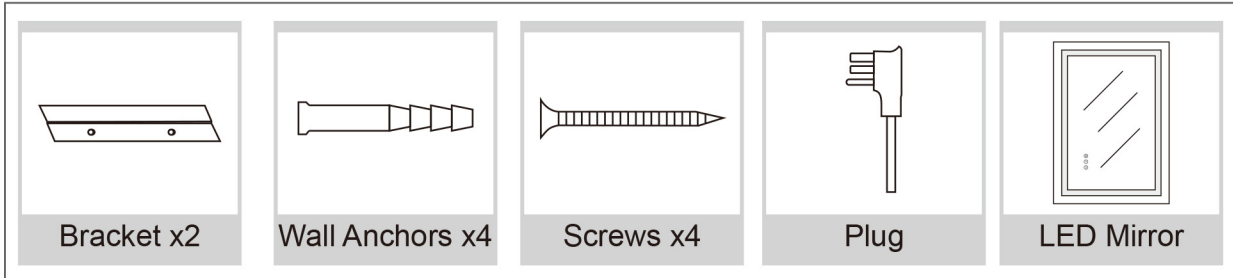
Package contents




You may need these tools

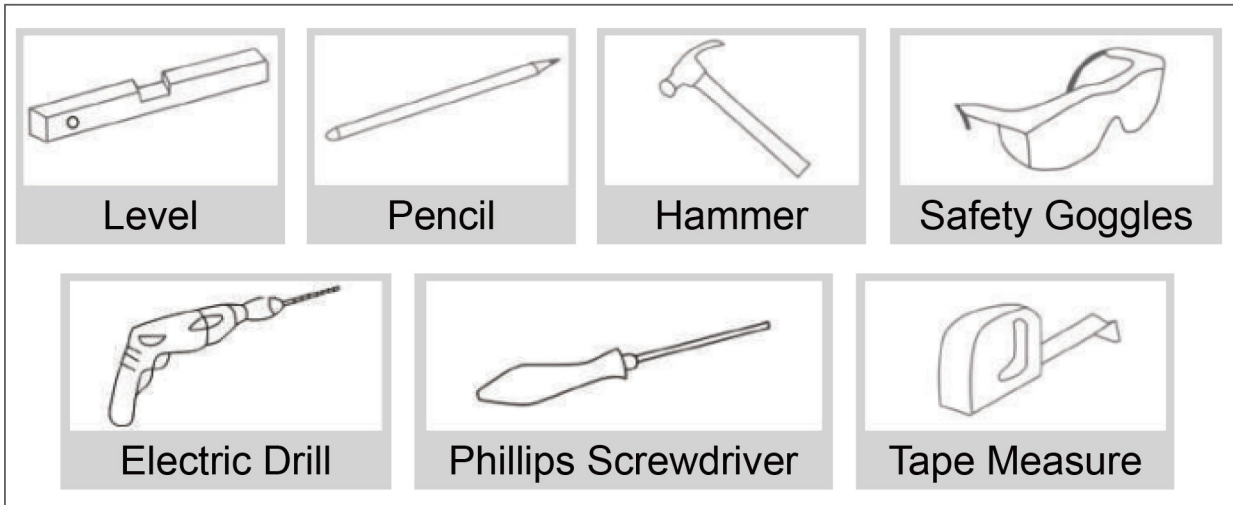

SIZE 1

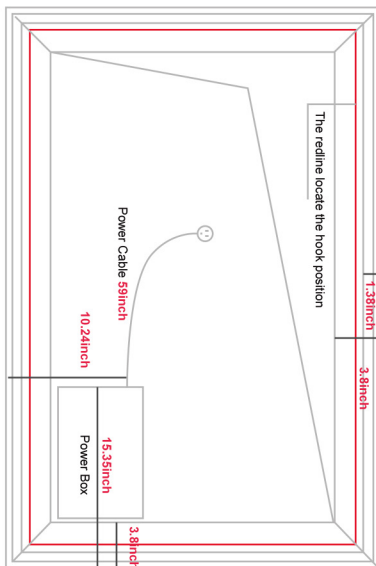

SIZE 2

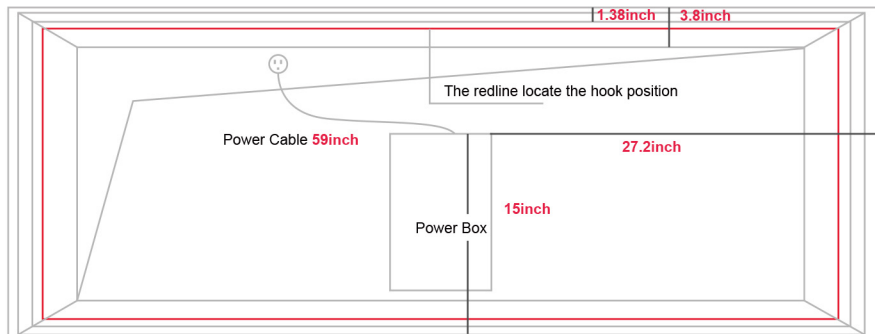

PS: The location of the button is locate the power box.

Meaning of LED Lights

State of LED Light	Meaning
White Light ON	Function is Working
Blue Light ON	Function Standby
Light OFF	Power OFF

Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the cover of the power supply on the back of the mirror to test the power cables, tighten the cables if they are loose. (Please cut off the power firstly before testing the power supply and cables)
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.



Call us (9-8 EST): +1 888-257-3857
Email us (24/5) : service@casainc.com

Message us : +1 562-551-8092
For sales : dtc@casainc.com